

GENERAL PURPOSE BACKBAR SERIES

SKOPE PREMIUM RANGE



Specifically designed for bars with adjustable shelf heights to fit a range of bottle shapes and sizes.

Photo Depicts: BB380 2SW Integral without a countertop fitted

These stylish horizontal cabinets with an external evaporator offer you more internal space than any other, saving you re-stocking time and giving you more selling time.

Generic Specifications

- Swing door cabinet operating temperature adjustable from +1°C to +4°C in 40°C ambient
- Sliding door cabinet operating temperature adjustable from +1°C to +4°C in 32°C ambient
- Consistent temperatures maintained by fan-forced ducted air flow
- Electronic controller with digital temperature display
- System overheat protection fitted as standard
- Exterior galvanised steel (powder coated white or optional black) or natural finish stainless steel (excluding galvanised steel top)
- Interior: galvanised steel (powder coated white or optional black) or natural finish stainless steel
- Easy plug-in, 10 Amp power supply (230-240V, 50Hz), via mains flex
- Removable sliding doors and extruded track for easy cleaning
- Refrigeration system protected from corrosion by an anti-corrosive blue coating treatment
- Left-hand side mounted service compartment as standard
- Two adjustable shelves per door as standard
- Full length, horizontal fluorescent lights and interior light switch
- Full length, ergonomic door handles
- Long life, replaceable magnetic door gaskets
- Heated wire in cabinet fascia to prevent condensation
- Insulation: 50mm thick, high density cyclo-isopentane polyurethane foam (CFC, HCFC & HFC free)

- R134a refrigerant (CFC & HCFC free)
- Adjustable legs and swivel castors for easy installation, positioning and relocation
- Cabinets supplied without a countertop as standard (optional 25mm countertop, please specify when ordering)

Self-closing door options


- Swing glass doors with double glazed toughened single low/e safety glass available with silver or black anodised finish
- Sliding glass doors with double glazed toughened single low/e safety glass available in silver or black anodised finish
- Swing solid doors available in stainless steel, white or black to match cabinet finish

Integral Specifications

- Left-hand side mounted, removable SKOPE Cyclone™ refrigeration system as standard with right-hand option
- Plumbing free design

Remote Specifications

- Evaporator box and service compartment on left hand side as standard with right-hand option
- Pipe work and drain exit inside service compartment. Rear exit access panel
- Thermostatic expansion valve fitted as standard (to suit R134a or 404A, please specify when ordering)
- See Remote Refrigeration System Specifications on page 112 for more information

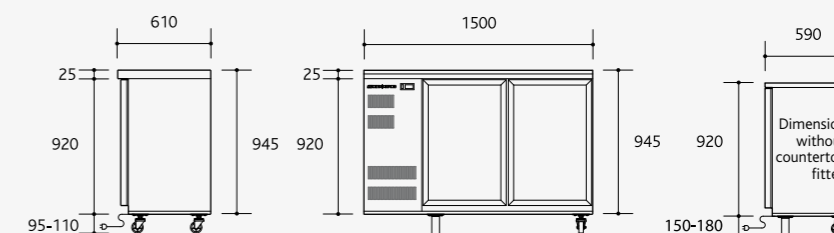




BB380 - SOLID/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer
BB380 2SW	148	Integral	Chiller
BB380r 2SW	118	Remote	Chiller
BB380 2SL	150	Integral	Chiller
BB380r 2SL	120	Remote	Chiller

	Integral External (mm)	Remote External (mm)	Internal (mm)	Gross Volume
Height*	920	920	758	380 litres
Width	1500	1355	1020	Total Shelf Area 1.32m ² (inc. floor)
Depth 1	590 (swing)	590 (swing)	530	Floor Area 0.89m ² (integral sw.)
Depth 2	600 (sliding)	600 (sliding)		0.89m ² (integral sl.)
				0.80m ² (remote sw.)
				0.81m ² (remote sl.)


- BB380r 2SW remote refrigeration duty 480 Watts at -5°C SST
- BB380r 2SL remote refrigeration duty 528 Watts at -5°C SST




Integral top view




Integral front elevation




Remote front elevation

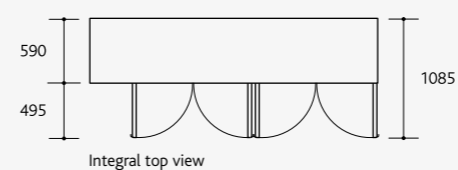

Integral top view

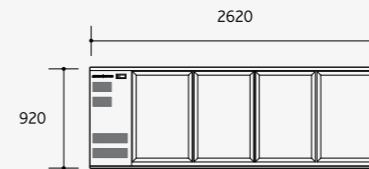

Integral front elevation

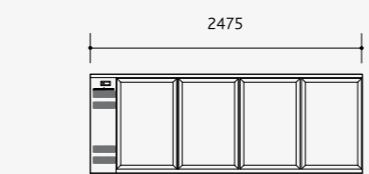

Remote front elevation



BB780 - SOLID/GLASS DOORS

✓ High Energy Efficiency

Model	Weight (kg)	Integral/Remote	Chiller/Freezer
BB780 4SW	227	Integral	Chiller
BB780r 4SW	197	Remote	Chiller
BB780 4SL	229	Integral	Chiller
BB780r 4SL	199	Remote	Chiller

	Integral External (mm)	Remote External (mm)	Internal (mm)	Gross Volume
Height*	920	920	758	780 litres
Width	2620	2475	2140	Total Shelf Area 2.79m ² (inc. floor)
Depth 1	590 (swing)	590 (swing)	530	Floor Area 1.54m ² (integral sw.)
Depth 2	600 (sliding)	600 (sliding)		1.55m ² (integral sl.)
				1.46m ² (remote sw.)
				1.48m ² (remote sl.)

- BB780r 4SW remote refrigeration duty 750 Watts at -5°C SST
- BB780r 4SL remote refrigeration duty 825 Watts at -5°C SST




BB580 - SOLID/GLASS DOORS

✓ High Energy Efficiency

Model	Weight (kg)	Integral/Remote	Chiller/Freezer
BB580 3SW	188	Integral	Chiller
BB580r 3SW	158	Remote	Chiller
BB580 3SL	190	Integral	Chiller
BB580r 3SL	160	Remote	Chiller

	Integral External (mm)	Remote External (mm)	Internal (mm)	Gross Volume
Height*	920	920	758	580 litres
Width	2060	1915	1580	Total Shelf Area 2.04m ² (inc. floor)
Depth 1	590 (swing)	590 (swing)	530	Floor Area 1.22m ² (integral sw.)
Depth 2	600 (sliding)	600 (sliding)		1.23m ² (integral sl.)
				1.13m ² (remote sw.)
				1.14m ² (remote sl.)


- BB580r 3SW remote refrigeration duty 580 Watts at -5°C SST
- BB580r 3SL remote refrigeration duty 638 Watts at -5°C SST

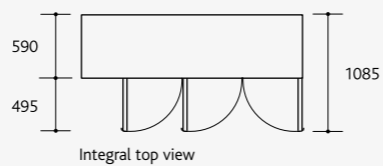

Integral top view



Integral front elevation



Remote front elevation

BB380
2 DOOR

BB580
3 DOOR

BB780
4 DOOR



TROPICAL GLASS DOOR OPTIONS

DOUBLE LOW/E ARGON

SOLENOID VALVE (REMOTES ONLY)

DOOR LOCK KIT

ADDITIONAL SHELVES

S/S COUNTERTOP (+25MM)

R/H INTEGRAL OR REMOTE SYSTEM

AVAILABLE AS

BACKBAR SERIES

SWING DOORS	AVAILABLE AS	R/H INTEGRAL OR REMOTE SYSTEM	S/S COUNTERTOP (+25MM)	ADDITIONAL SHELVES	DOOR LOCK KIT	SOLENOID VALVE (REMOTES ONLY)	DOUBLE LOW/E ARGON	HEATED GLASS (SWING DOORS ONLY)
BB380 2SW	integral & remote							n/a
BB580 3SW	integral & remote							
BB780 4SW	integral & remote							
SLIDING DOORS								
BB380 2SL	integral & remote							n/a
BB580 3SL	integral & remote							n/a
BB780 4SL	integral & remote							n/a

NOTE: n/a - not applicable.