

**Garnet 2/1 Gastronorm Upright Cabinet**

**Features:**

- Designed for 43°C ambient environment
- Adjustable electronic controller with digital temperature display
- Four 2/1 Gn plastic coated shelves/door
- Accommodates 2/1 gastronorm pans on shelves or dedicated anti tilt tray slides
- Top mounted self contained cabinet
- Auto defrost
- Waste heat recovery vaporiser
- Coved internal liners
- Cylindrical locks fitted
- Self closing doors with easy to clean handles
- Swivel and brake castors
- Hermetique compressor
- Coolsmart energy efficient controller

Garnet




Foodservice Uprights

Model	G1	G2
Capacity	610 litre	1270 litre
<b>Finish – Stainless steel interior &amp; exterior*</b>		
Refrigerator Solid door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	<b>HG1SDSS</b> 170/3.8/470	<b>HG2SDSS</b> 220/5.3/670
Freezer Solid Door -18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	<b>LG1SDSS</b> 170/4.3/630	<b>LG2SDSS</b> 220/5.4/900
Dual Temperature Solid Door H +1°/+4°/L -18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	<b>HLG1SDSS</b> 180/6.5/310-400	<b>HLG2SDSS</b> 220/8.0/450-600

\*Refer notes page 8

Gas: Self-contained fridge R134a@-5C SST  
 Self-contained freezer R404a@-30C SST  
 Remote units R404a (others available)  
 Electrical lead length 1.5m min. 240V 50Hz  
 Heat rejection self-contained units: Fridge 1.4xWr, Freezer 1.6xWr

Options (see page 8):

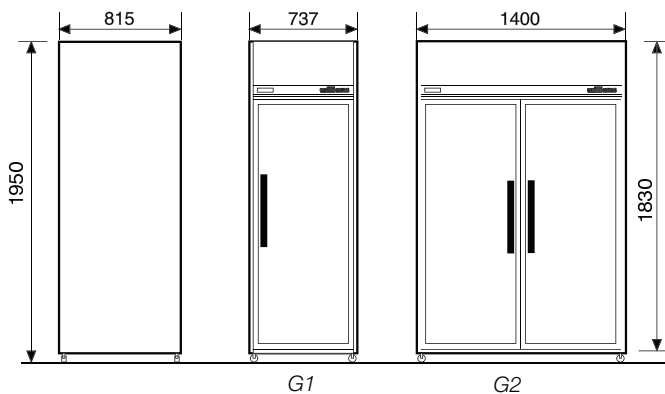

Prices do not include GST. Prices and specifications are subject to change without notice.

[www.williamsref.com.au](http://www.williamsref.com.au)

